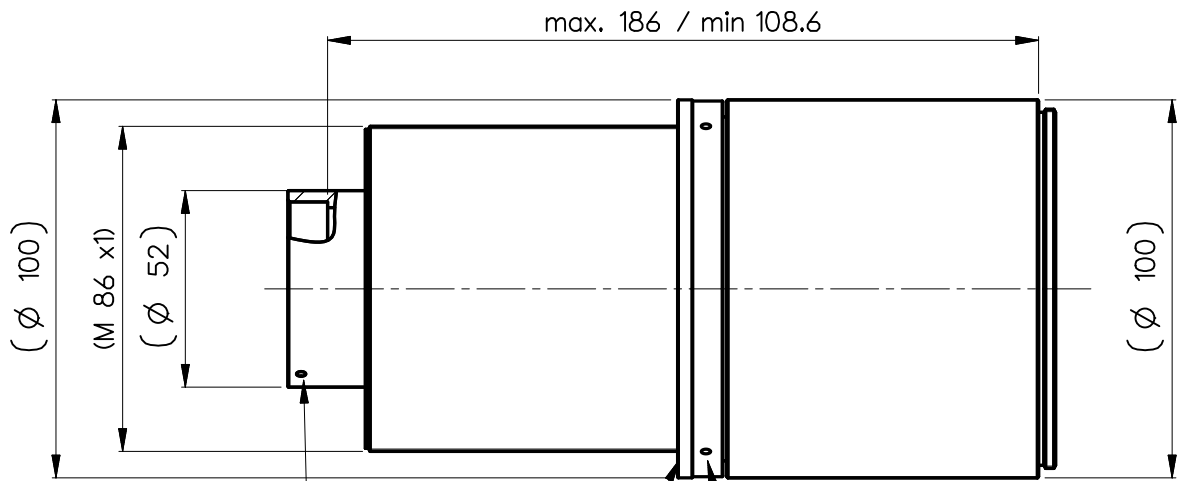


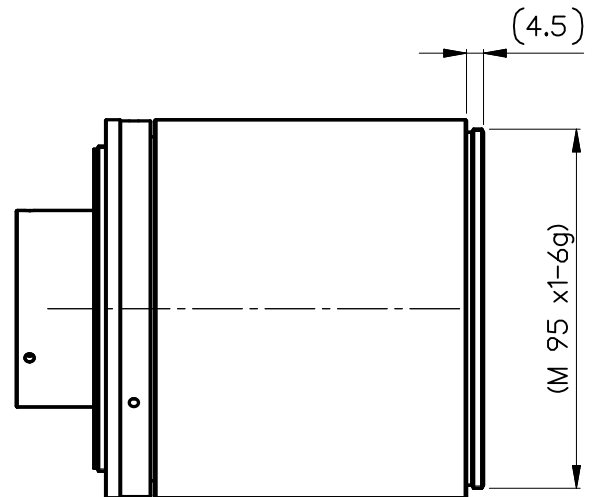

Date: 03-Feb-12 User: infodba
Time: 13:27 Node: skipper



Drei Schrauben zur Objektivmontage
und Einstellung des besten Azimut
Three screws to mount the lens
and adjust for the best azimuth



Konterring
locking ring

Drei Schrauben, um den
Konterring zu sichern
Three screws to secure
the locking ring



order number	for lens
2408-012-000-43	0703-082-000-20
	0703-083-000-20

Focus Tube M95 L

NX	EU-D		AL-T1A		US-D		US-ML		not export controlled	
							PDM Status Freigabe		unrestricted	
PROTECTIVE NOTE "DIN ISO 16016" TO BE OBSERVED	REV	ECC	DATE	APPROVED	GENERAL TOLERANCE OF DIMENSION, FORM, POS. ISO 2768-mH		SURF. TREATMT		SCALE 1:5 (1:2)	
	a	Neuausg							MATERIAL	
	b	12-0001	01.02.12	Kuehne						
	c	12-0001	03.02.12	Kuehne						
					BASIC TOLERANCING PRINCIPLE		TITLE Fokus.-Tubus M95 5.6/105 β' = -0.76 ... -1.0			
					FIRST	DATE	NAME			
					ISSUE	11.01.12	Schifferer			
					CHKD	11.01.12	Stauder			
DIN A 4							DRAWING NO.		SHEET 1 OF 1	
	ALL DIMENSIONS ARE IN MM AND INCLUDE SURFACE TREATMENT						2408-012-100-43-0001c			
						REPLACES				