



TECHNICAL DATA

B2514D

25mm 1:1.4


calculated

●Optical Transfer Function (OTF)

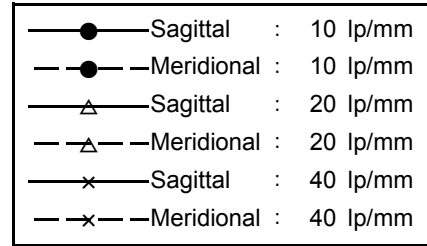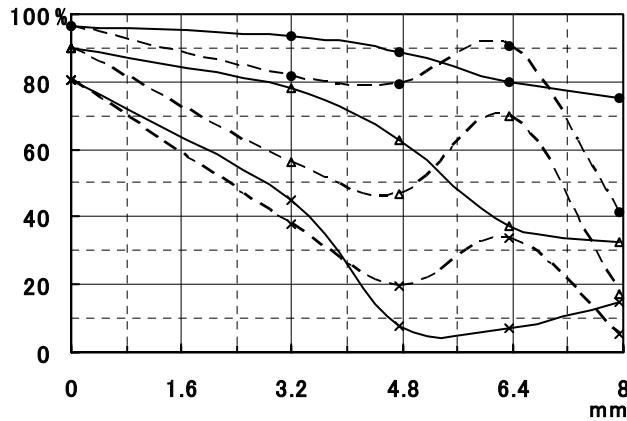


4D-0153T0470


●Distortion (歪曲収差)

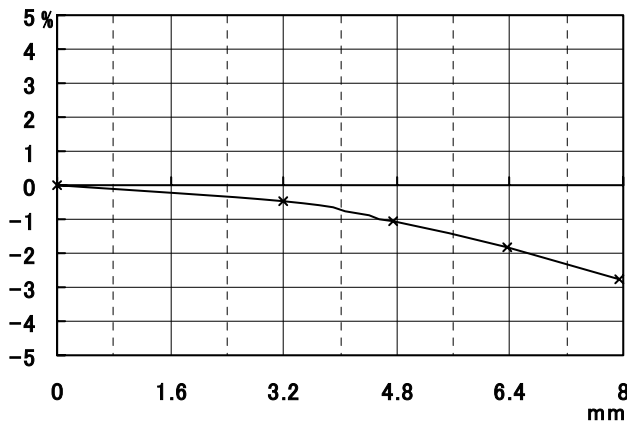

●Vignetting (周辺光量)

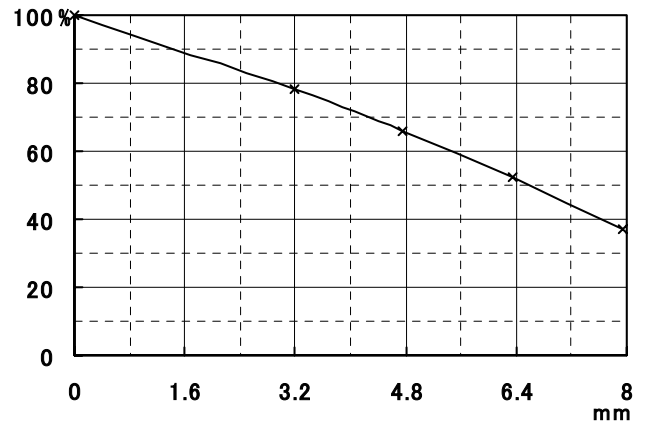

●Spectral Transmittance (分光透過率)

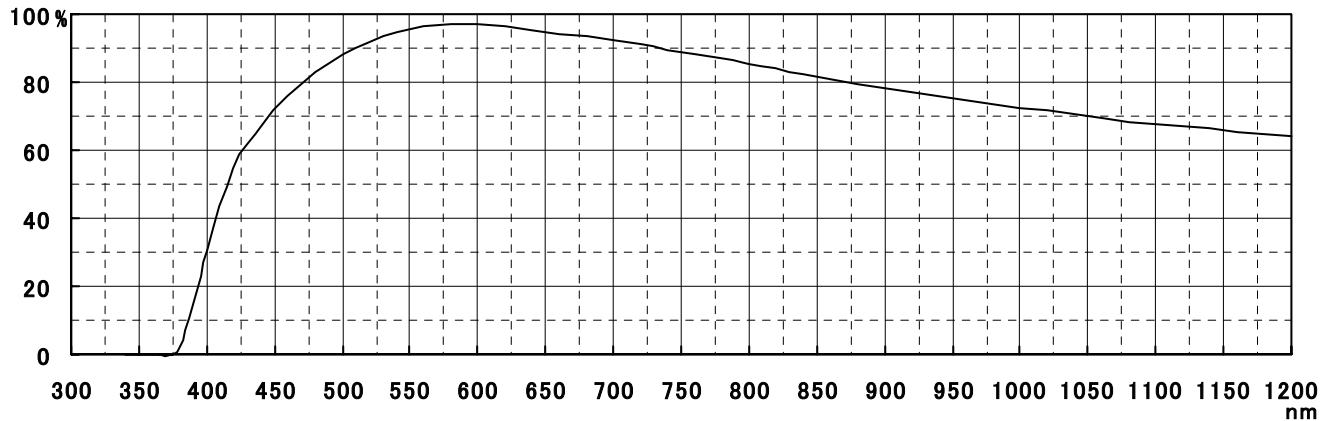

●Resolving Power (解像力)

y	0	4.76	6.35	7.94		
Rr(S)	200	25	20	20		
Rt(M)		25	40	10		

●Entrance Pupil Position (入射瞳位置)

-30.27 [mm] *

●Exit Pupil Position (射出瞳位置)

-30.81 [mm] *

●1st Principal Point (第一主点)

-25.59 [mm] *

●2nd Principal Point (第二主点)

-25.06 [mm] * (* : From Image Plane)

HOYA CORPORATION
PENTAX Imaging Systems Division

これらの値は設計データより算出された値です。 / 光学研究所

The above figures are calculated on design data. / Optical Technology Center

Drawing Number

22529

1 / 1