

TECHNICAL DATA



YK/YF3528

35mm 1:2.8

calculated


●Optical Transfer Function (OTF)

M = -0.2

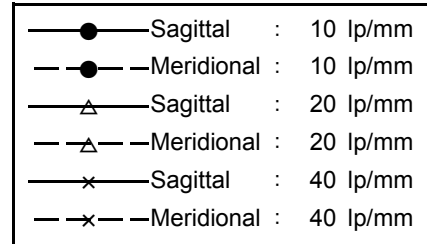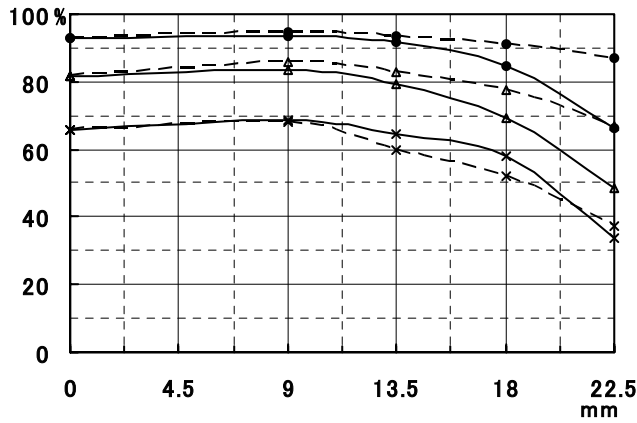


4D-1270T0000


●Distortion (歪曲収差)

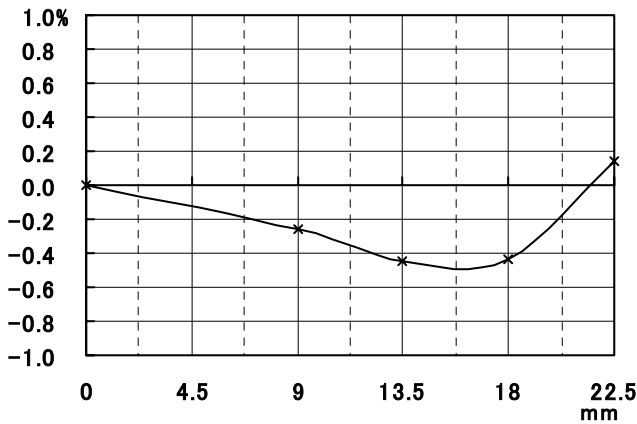

●Vignetting (周辺光量)

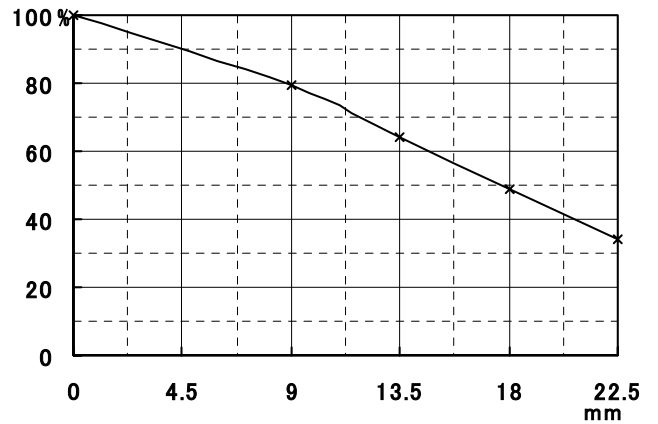

●Spectral Transmittance (分光透過率)

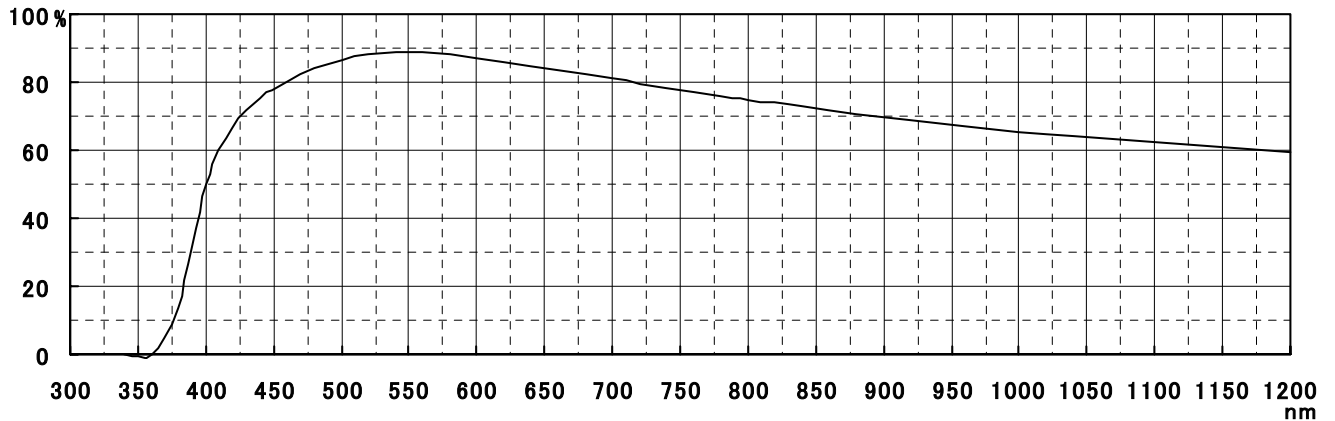

●Resolving Power (解像力)

y	0	9	12	15	18	21
Rr(S)	125	80	80	80	100	80
Rt(M)	125	80	100	80	63	63

●Entrance Pupil Position (入射瞳位置)

-72.30 [mm] *

●Exit Pupil Position (射出瞳位置)

-51.04 [mm] *

●1st Principal Point (第一主点)

-61.81 [mm] *

●2nd Principal Point (第二主点)

-36.29 [mm] * (* : From Image Plane)

HOYA CORPORATION
PENTAX Imaging Systems Division

これらの値は設計データより算出された値です。 / 光学研究所

The above figures are calculated on design data. / Optical Technology Center

Drawing Number

52915

1/1