

This lens is optimized for 12k / $5\mu m$ (62.5 mm) line scan sensors but can also be used with area scan cameras. The lens provides high performance at >72 LP/mm with low color shift and detects the smallest targets to solve the most challenging applications. The V-Mount interface makes it easy to install numerous mounts and allows to rotate the lens into the highest performance.

Key features

- Broadband AR 400-1000nm
- Low chromatic focal shift
- High MTF over the entire field


Applications

- PCB inspection
- Flat Panel inspection
- LCD inspection
- Alignment tasks

| Туре | -0001 |
|-----------------------------------|----------------|
| ID | 1079320 |
| Interface | V70-Mount |
| Focal length [mm] | 82 |
| F/# range | F/1.5 F/11 |
| Numerical aperture | 0.22 |
| Max. sensor size [mm] | 62.5 |
| Max. angle of view [°] | 5 |
| Rec. magnification range | -5.2 (-5.35.1) |
| Rec. working distance range [mm] | 55 56 |
| Max. mechanical focus travel [mm] | - |
| Filter thread [mm] | M58x0,75 |
| Storage temperature [°C] | 0 +50 |
| Net. weight [g] | 1030 |
| Additional info | - |
| f'eff [mm] | 82.87 |
| SF [mm] | -40.31 |
| S'F' [mm] | -41.19 |
| HH' [mm] | -31.28 |
| В'Р | 0.79 |
| SEP [mm] | 64.18 |
| S'AP [mm] | -106.92 |
| Σd [mm] | 135.35 |




| MTF charts | | | | | | |
|------------------|---------|------|------|------|------|-----|
| Spectrum name | VIS LED | | | | | |
| Wavelengths [nm] | 425 | 475 | 525 | 575 | 625 | 675 |
| Rel. weights [%] | 1.5 | 13.6 | 26.5 | 27.8 | 24.2 | 6.4 |

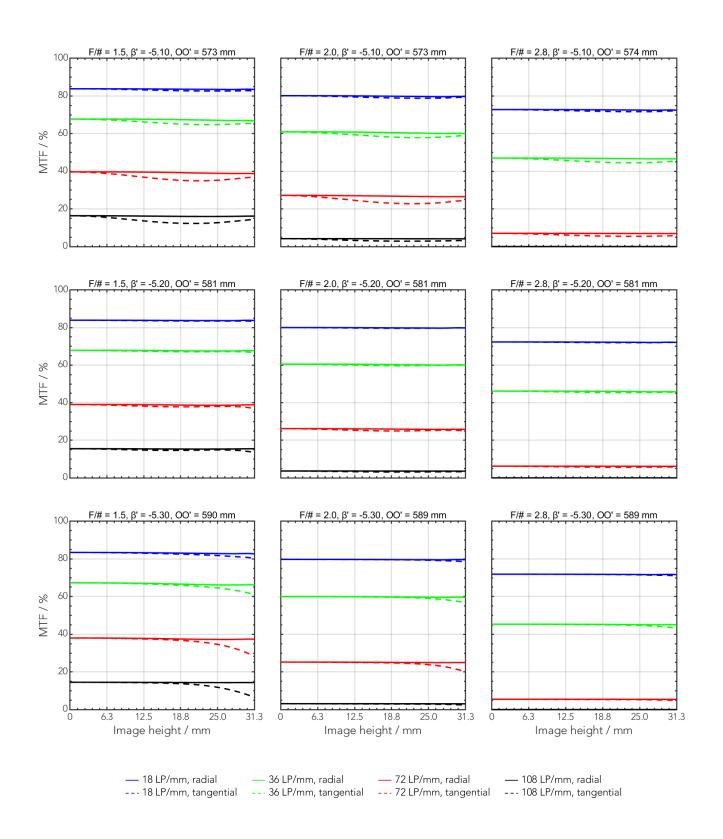




Rel. illumination vs. image height

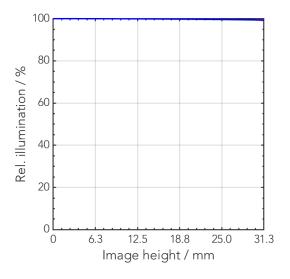


Distortion vs. image height

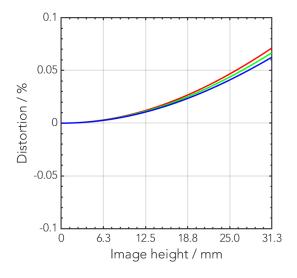




Transmittance vs. wavelength

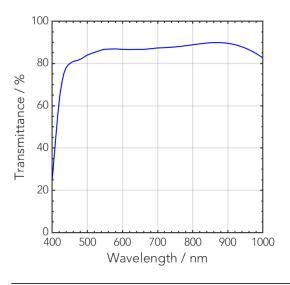



Technical drawings

* WD and s'A in air at beta' -5.2

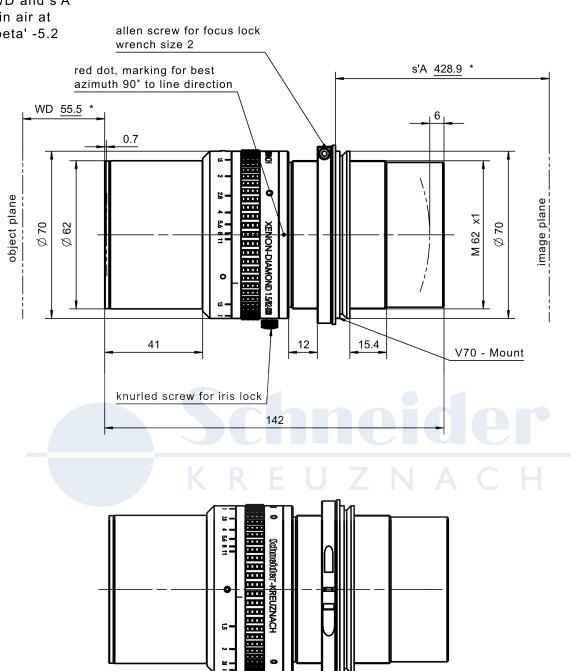

standard



| Accessories | Mount | Eff. length | ID |
|----------------|-------------------------|-------------|---------|
| Adapter | V70 / M72 x 0.75 | 10 mm | 1072419 |
| Extension tube | M72 x 0.75 / M72 x 0.75 | 5 mm | 1072420 |
| | M72 x 0.75 / M72 x 0.75 | 10 mm | 1072421 |
| | M72 x 0.75 / M72 x 0.75 | 25 mm | 26406 |
| | M72 x 0.75 / M72 x 0.75 | 50 mm | 1054733 |



| Annotation | | | |
|------------------------------|---|--|--|
| Focal length | Nominal focal length | | |
| F/# range | Image space F-number range for infinity focus position | | |
| Numerical aperture | Maximum real numerical aperture (depending on recommended magnification range either for infinity or respective fixed magnification) | | |
| Max. sensor size | Image circle diameter | | |
| Max. angle of view | Angle of view associated with maximum sensor size (depending on recommended magnification range either for infinity or respective fixed magnification) | | |
| Rec. magnification range | Magnification range as recommended by Schneider-Kreuznach | | |
| Rec. working distance range | Working distance, i.e. distance between object and first mechanical element, associated with recommended magnification range | | |
| Max. mechanical focus travel | Maximum possible movement of the lens from infinity position (depending on recommended magnification range either for infinity or respective fixed magnification) | | |
| Net weight | weight of unpacked lens without lens cap | | |
| f'eff | Effective focal length | | |
| SF | Distance between vertex of first lens surface and object space focal point | | |
| S'F' | Distance between vertex of last lens surface and image space focal point (back focal distance at infinity) | | |
| HH' | Distance between principal planes | | |
| β'P | Pupil magnification (= exit pupil diameter / entrance pupil diameter) | | |
| SEP | Distance between vertex of first lens surface and entrance pupil | | |
| S'AP | Distance between vertex of last lens surface and exit pupil | | |
| Σ d | Distance between vertices of first and last lens surface | | |
| s'A | Flange focal distance (in air) for infinite object distance (depending on recommended magnification range either for infinity or respective fixed magnification) | | |
| ß' | Magnification (= image size / object size), negative value because image is inverted | | |
| 00' | Distance between object and image | | |

Unless otherwise stated all dimensions in this data sheet are in mm.



Headquarters Europe

Jos. Schneider Optische Werke GmbH

Ringstraße 132

55543 Bad Kreuznach

+49 671 601 205

☑ cs@schneiderkreuznach.com

www.schneiderkreuznach.com

Offices Worldwide

America

@ +1 800 228 1254 (West Coast)

☑ info@schneideroptics.com

Asia

☑ info@schneider-asiapacific.com