
DATA SHEET



S5LPJ2298 Correctal® T60/0.24

- telecentric lens
- with c-mount
- with variable iris



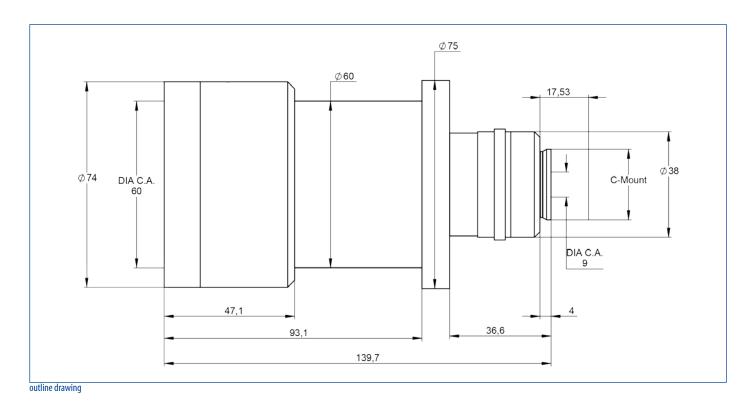


Sill Optics GmbH & Co. KG Johann-Höllfritsch-Straße 13 D-90530 Wendelstein Copyright © Sill Optics GmbH & Co. KG All rights reserved. Issue A Published: 23.03.2017 Tel.: +49 (0) 9129 9023 0 Fax: +49 (0) 9129 9023 23 E-mail: info@silloptics.de Web: www.silloptics.de


All information contained in this data sheet is for information purposes only and is not binding. The content is subject to change at any time without notification, all information without guarantee. We reserve the right to make constructional changes in the course of product improvement.

DATA SHEET



specifications	
article number	S5LPJ2298
design wavelength [nm]	450-700
magnification (+/-5%)	0.244
working distance [mm] (+/-2%)	92.0
object size [mm] at a chip size of [mm] distortion [%]	19.6 x 14.7 4.8 x 3.6 (1/3") < 0.05
object size [mm] at a chip size of [mm] distortion [%]	26.2 x 19.6 6.4 x 4.8 (1/2") < 0.05
object size [mm] at a chip size of [mm] distortion [%]	36 x 27 8.8 x 6.6 (2/3") < 0.05
max. telecentricity error [°]	0.12
numerical aperture	0.02
weight [kg]	0.80
flange back distance [mm]	17.53
accessory	S5SET0020, S5SET5016

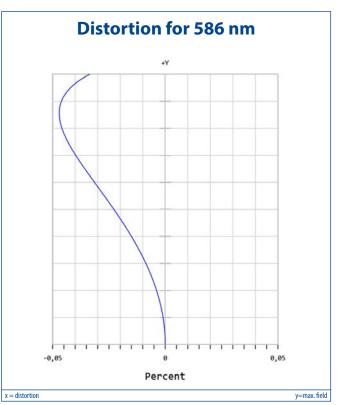

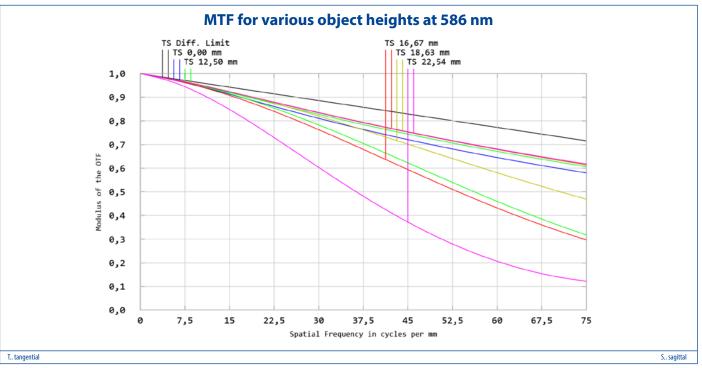

graphs and data given by design.

Sill Optics GmbH & Co. KG Johann-Höllfritsch-Straße 13 D-90530 Wendelstein Copyright © Sill Optics GmbH & Co. KG All rights reserved. Issue A Published: 23.03.2017 Tel.: +49 (0) 9129 9023 0 Fax: +49 (0) 9129 9023 23 E-mail: info@silloptics.de Web: www.silloptics.de

All information contained in this data sheet is for information purposes only and is not binding. The content is subject to change at any time without notification, all information without guarantee. We reserve the right to make constructional changes in the course of product improvement.